



# CALFLO™ (CFSG3)

## Flow and Temperature Thermal Mass Flow Switch


The CALFLO™ CFSG3 flow and temperature thermal mass flow switch is a highly precise, compact industrial instrument. The CFSG3 works according to the calorimetric principle which is evaluated by using microprocessor technology.

### FEATURES & BENEFITS

- Switch-point factory set
- Simple commissioning
- Reliable and durable
- Water-based media
- No moving parts
- LED display for power and switching status
- Rugged design
- Maintenance-free
- 5-year warranty

### CONNECTION DIAGRAM

PNP - Transistor - Ausgang  
PNP - transistor - output

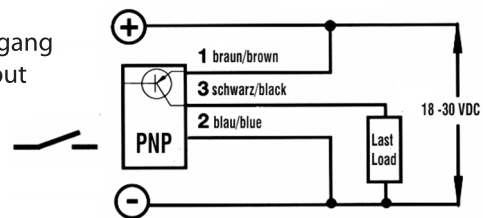

### TYPICAL APPLICATIONS



Agriculture



Chemical & Petrochemical



Environmental Water & Wastewater



Life Sciences



Minerals & Mining



Oil & Gas



OEM



Power & Energy

# SPECIFICATIONS

TECHNICAL DATA	
MEDIUM	Water-based
SENSOR DATA	
SET-POINT	factory-set 80 cm/s (other set-point on request)
MEDIUM TEMPERATURE	-20 °C to +80 °C
AMBIENT TEMPERATURE	-20 °C to +70 °C
PRESSURE	up to 100 bar (10000 KPa)
RESPONSE TIME	approx. 5 sec.
REPEATABILITY	< 2 %
HYSTERESIS	approx. 10 %
MECHANICAL DATA	
PROTECTION CLASS	IP 65
MATERIAL HOUSING	PBTP, glass fibre reinforced (Ultradur®)
SENSOR PIPE	stainless steel AISI 303

THREAD	1/2" - 14 NPT or G 1/2" BSP
ELECTRICAL CONNECTION	integrated plug connection with PG9 fitting, 2 m oilflex cable 3 x 0,5 mm2
ELECTRICAL DATA	
OPERATING VOLTAGE	18 - 30 VDC incl. residual ripple
CURRENT CONSUMPTION	max. 150 mA pulsed
INTERNAL CONSUMPTION	Internal consumption approx. 1 W
SWITCHING CURRENT	≤ 400 mA
PROTECTIVE CIRCUIT	reverse polarity, short circuits and overload protection (ready for operation after correcting the short circuit)
OPERATION READINESS	approx. 10 sec. after applying the operating voltage
ELECTRICAL OUTPUT	n.o. (closer) currentless
ELECTRICAL OUTPUT INDICATION	LED = switch state red / green
Specifications are subject to change without notice.	


## ORDERING INFORMATION

### FLO-CORP MODEL NUMBER BUILDER

For Assistance Call **877.356.5463**

**Example:** CFSG3-1-LS-N

CFSG3 Flow and Temperature Flow Switch, NEMA 6 rating, 122°F Temp set point, short sensor, M12 x 1.4-Pin Connection Plug

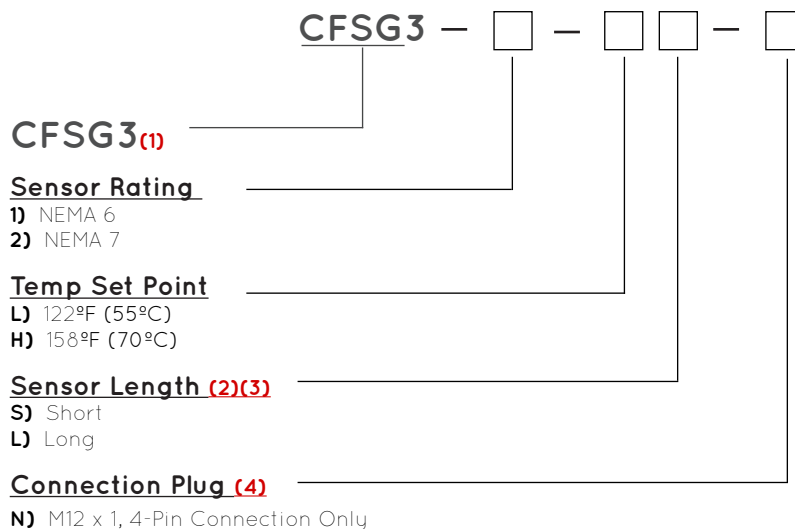

#### ORDERING NOTES

- (1) Select the best configuration based on your requirements. Classifications for each type:  
CFSG3-1: NEMA 6 - General Purpose (Comes with 6.5' PVC cable)  
CFSG3-2: NEMA 7 - Hazardous Proof
- (2) Select the short sensor for use with pipe sizes ½" to 1½" in diameter and the long sensor for 2" and up.
- (3) This unit comes standard with NPT (US) threaded connections. To special order BSP (Metric) connections, place BSP at the end of the P/N: (ie CFSG3-1-LS-BSP).
- (4) Standard M12 cable is required for operation.